




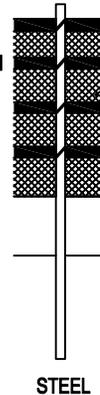

MINIMUM OF 8" BLACK UV 120 LBS. ZIP TIES FOR STEEL
1" X 1 1/4" STAPLES FOR WOOD
TO BE PLACED AT EACH SUPPORT BELT.

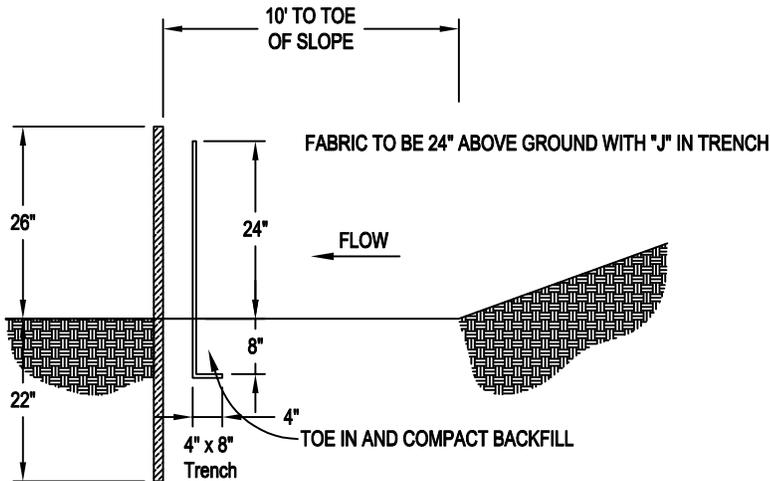

STEEL

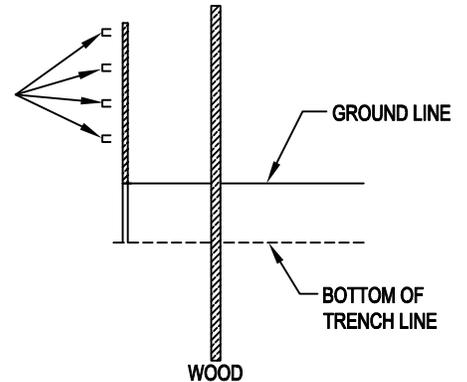


WOOD

SIDE VIEW


USE STEEL POSTS THAT MEET STATE STANDARDS & SPECIFICATIONS FOR THE STATE THAT THE SILT FENCE WILL BE INSTALLED.

USE OAK/HARDWOOD POST 1 3/4 x 1 1/4 x 48" OR EQUAL DENSITY OR STATE STANDARDS, WHICH EVER IS GREATER.

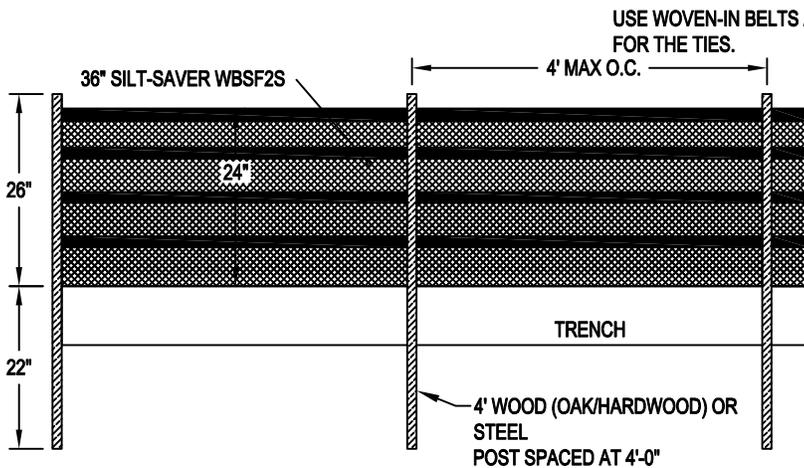

FRONT ELEVATION

USE WOVEN-IN BELTS AS ATTACHMENT POINTS FOR THE TIES.

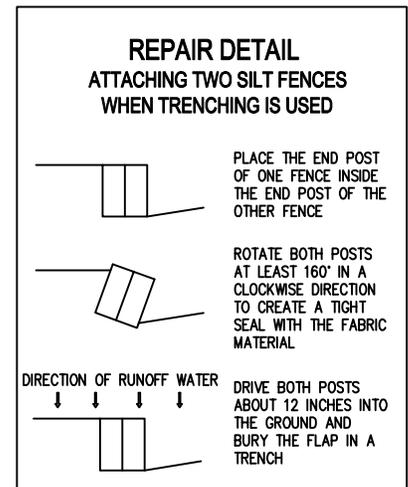

REPAIR DETAIL ATTACHING TWO SILT FENCES WHEN TRENCHING IS USED

PLACE THE END POST OF ONE FENCE INSIDE THE END POST OF THE OTHER FENCE

ROTATE BOTH POSTS AT LEAST 160° IN A CLOCKWISE DIRECTION TO CREATE A TIGHT SEAL WITH THE FABRIC MATERIAL

DIRECTION OF RUNOFF WATER

DRIVE BOTH POSTS ABOUT 12 INCHES INTO THE GROUND AND BURY THE FLAP IN A TRENCH

PLAN VIEW

WOVEN BELTED SILT FENCE (WBSF)

2 STAGE (2S)
WBSF2S-4

FRAME MATERIAL: OAK/HARDWOOD OR STEEL

FILTER FABRIC MATERIAL: REFER TO SPEC

SCALE: NOT TO SCALE

LAST UPDATED: MARCH 2022