
**INSTALLATION**

ENSURE THE CEMENT RISER IS FREE OF ANY OBSTRUCTION THAT WOULD PREVENT A FLUSH INSTALLATION. WRAP THE PEDESTAL INLET PROTECTION (P-400) AROUND THE RISER. OVERLAP THE STRAP SIDE TO THE SIDE WITH THE BUCKLE ATTACHMENTS. ATTACH AND PULL TIGHT. ENSURE ALL OPENINGS ARE COVERED.

**MAINTENANCE**

ALL TEMPORARY EROSION, SEDIMENTATION, & POLLUTION CONTROL PRACTICES SHOULD BE INSPECTED DAILY. CONTRACTOR SHALL REMOVE SEDIMENT. INSPECT DAILY FOR CUTS, ABRASIONS, AND PROPER INSTALLATION. REPLACE OR REPOSITION AS NECESSARY.

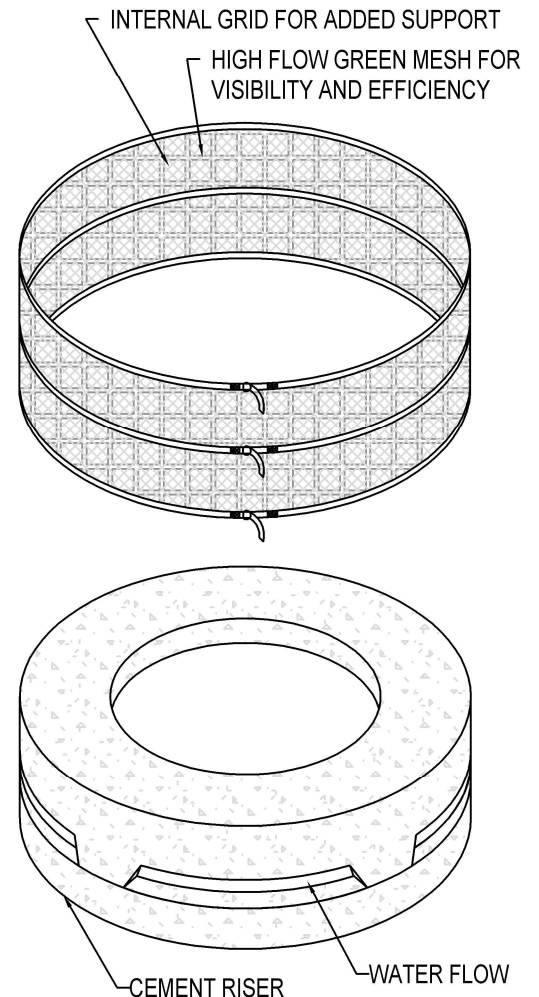

## PEDESTAL INLET WRAP

### PART# P-400

FABRIC MATERIAL: POLYPROPYLENE WITH GEOGRID REINFORCEMENT

SCALE: NOT TO SCALE

LAST UPDATED: 7-17-2023