



**ELEVATION  
VIEW**

LOAD SUPPORTING  
LIFTING HANDLES

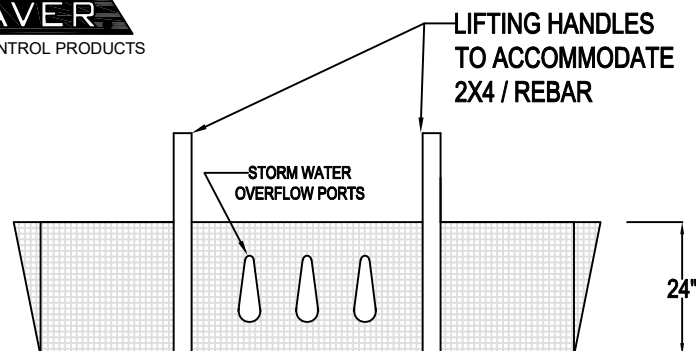


**SIDE VIEW**

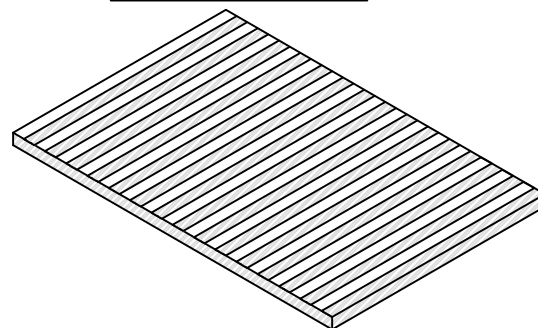

6" LIFTING HANDLES  
TO ACCOMMODATE  
2X4 / REBAR

STORM WATER OVERFLOW PORTS  
LOCATED ON EACH SIDE

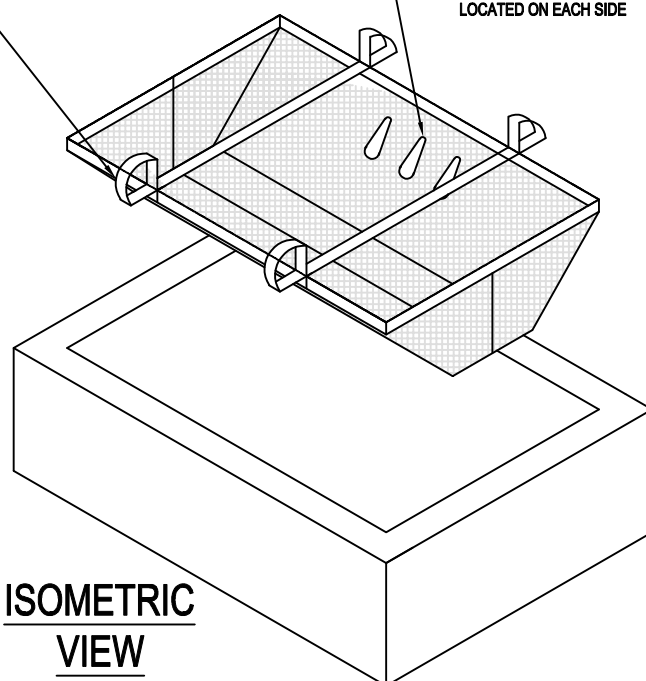

**ISOMETRIC  
VIEW**

**FILTER INSTALLATION**

PLACE GRATE UPSIDE DOWN BEHIND OPENING. PLACE UNDER GRATE SEDIMENT BAG OVER GRATE ALIGNING CORNERS OF THE BAG WITH THOSE OF THE GRATE. FLIP THE GRATE OVER WHILE HOLDING THE BAG IN PLACE. PLACE 2x4 IN LIFTING HANDLES OF BAG. LIFT AND SET GRATE INTO OPENING. ENSURE SEATING IS CORRECT AND TUCK HANDLES INTO GRATE.

TO EMPTY, PLACE 2x4 INTO LIFTING HANDLE AND LIFT GRATE WITH BAG. EMPTY, CLEAN AND REPLACE

**MAINTENANCE**

ALL TEMPORARY EROSION + SEDIMENT CONTROL PRACTICES SHOULD BE INSPECTED DAILY. CONTRACTOR SHALL REMOVE TRASH AND DISPOSE OF IN A PROPER MANNER.

**FABRIC MATERIAL**

UV RESISTANT 40 SIEVE WOVEN POLYPROPYLENE GEOTEXTILE

**UNDER GRATE SEDIMENT BAG**

**AVAILABLE SIZES**

18"X36" 21"X29" 24"X24" 24"X36" 24"X48" 27"X27" 28"X36" 36"X36" 36"X48" 40"X55"

**MODEL# SB**

ITEM ID: GRATE INLET PROTECTION

SCALE: NOT TO SCALE

LAST UPDATED: FEBRUARY 2022