



SD C-SYS

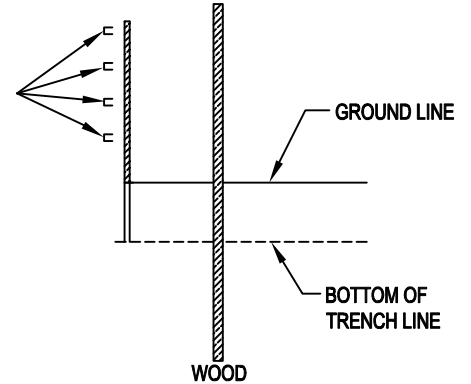

MINIMUM OF 8" BLACK UV 120 LBS.
ZIP TIES FOR STEEL
1" X 1 1/4" STAPLES FOR WOOD


TO BE PLACED AT EACH
SUPPORT BELT.
(4 BELTS TOTAL)

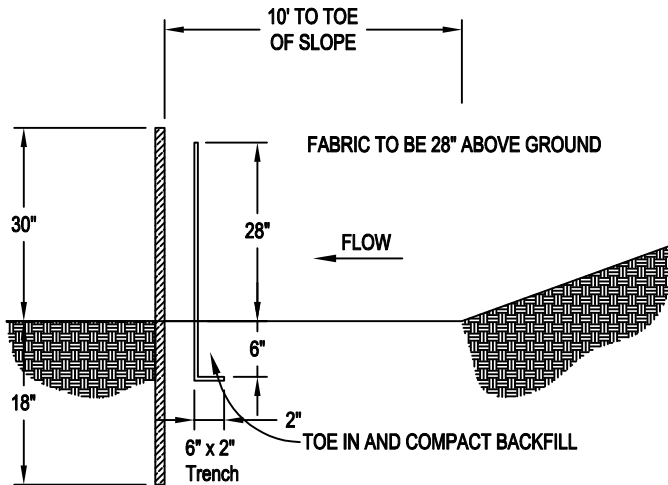

USE STEEL POSTS THAT ARE 1.15 MIN.
USE WOVEN-IN BELTS AS ATTACHMENT POINTS
FOR THE TIES.


USE OAK/HARDWOOD POST
MINIMUM 1 3/4 x 1 1/4 x 48"

SIDE VIEW

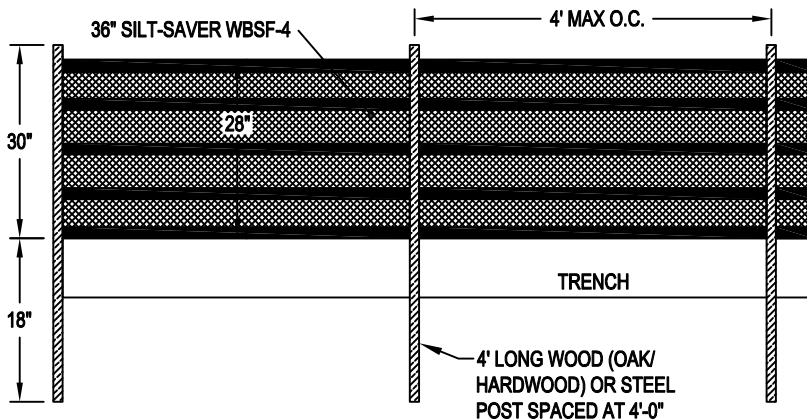

FRONT ELEVATION

REPAIR DETAIL ATTACHING TWO SILT FENCES WHEN TRENCHING IS USED

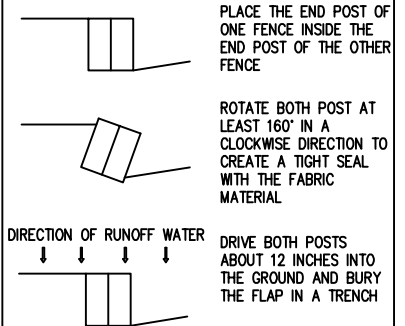

PLAN VIEW

HEAVY DUTY WOVEN BELTED WBSF SD C SYSTEM

FRAME MATERIAL: OAK/HARDWOOD OR STEEL
FILTER FABRIC MATERIAL: REFER TO SPEC
SCALE: NOT TO SCALE
LAST UPDATED: 04-27-20 G