

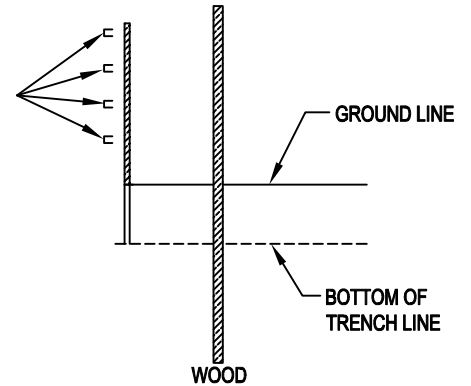





MINIMUM OF 8" BLACK UV 120 LBS.
 ZIP TIES FOR STEEL
 1" X 1 1/4" STAPLES FOR WOOD
 TO BE PLACED AT EACH
 SUPPORT BELT.

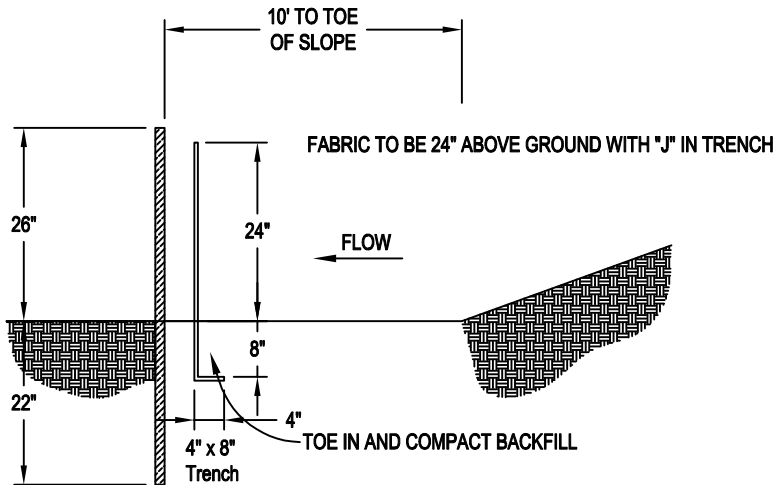

SIDE VIEW


USE STEEL POSTS THAT MEET STATE STANDARDS & SPECIFICATIONS FOR THE STATE THAT THE SILT FENCE WILL BE INSTALLED. USE WOVEN-IN BELTS AS ATTACHMENT POINTS FOR THE TIES.

USE OAK/HARDWOOD POST 1 1/8 x 1 1/8 x 48" OR EQUAL DENSITY, STATE STANDARDS OR WHICH EVER IS GREATER.

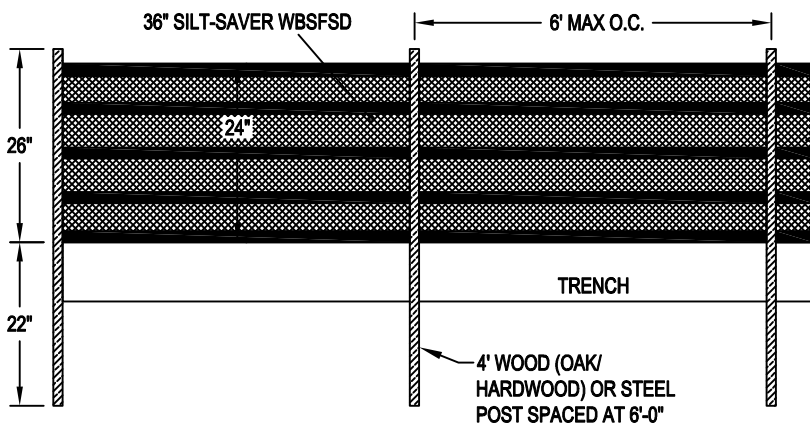

FRONT ELEVATION

REPAIR DETAIL ATTACHING TWO SILT FENCES WHEN TRENCHING IS USED

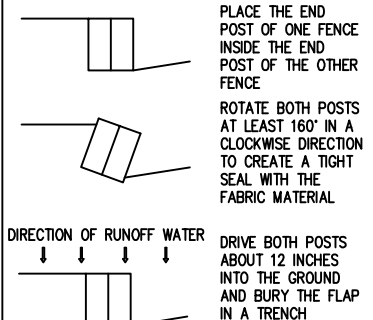

PLAN VIEW

WOVEN BELTED SILT FENCE (WBSF) STANDARD (SD) WBSFSD-6

FRAME MATERIAL: OAK/HARDWOOD OR STEEL
FILTER FABRIC MATERIAL: REFER TO SPEC
SCALE: NOT TO SCALE
LAST UPDATED: MARCH 2022