



Performance Based Sediment & Erosion Control Products



1200 Forrester Cemetery Rd, Covington, GA 30014

www.siltsaver.com ☎ 770-388-7818

✉ Info@siltsaver.com





BSRF™ PRIORITY 1

Belted Silt Retention Fence – Priority 1
REINFORCED SILT FENCE



NON-WOVEN HEAVY-DUTY SILT FENCE

(GREEN BAND)

Designed for use in
Heavy Duty Sensitive Areas

**48' PRE-STAKED ROLLS
OAK / HARDWOOD POSTS
SPACING AT 4' CENTERS**

Structural Integrity – Stormwater Release – Sediment Retention

- 36" tall, non-woven spun-bond polyester fabric with an internal fiberglass scrim for added support
- Superior filtration in slurry conditions – exceeds Federal Guidelines with > 96% efficiency
- The continuous green band at the top of the fence, as well as a unique method of attachment (sandwiching the fabric between the wood post and a bonding strip) enhances the strength of the system



BSRF™ PRIORITY 2

Belted Silt Retention Fence – Priority 2

NON-WOVEN MEDIUM-DUTY SILT FENCE

(BLACK BAND)

Designed for use in
Medium Duty Sensitive Areas



**100' PRE-STAKED ROLLS
OAK / HARDWOOD POSTS
SPACING AT 6' CENTERS**

Structural Integrity – Stormwater Release – Sediment Retention

- 36" tall, non-woven spun-bond polyester fabric
- The continuous black band at the top of the fence, as well as a unique method of attachment (sandwiching the fabric between the wood post and a bonding strip) enhances the strength of the system
- Belt provides strong linear support & disperses weight between posts
- Superior filtration in slurry conditions - Exceeds 96% filtration efficiency

PERIMETER PROTECTION – SILT FENCE



WBSF™ STANDARD

Woven Belted Silt Fence (WBSF™)
REINFORCED SILT FENCE

NTPEP Compliant

WBSF™ System

Five
>350 lb. tensile
strength belts woven
into the fabric



Part# WBSFSD

Structural Integrity – Stormwater Release – Sediment Retention

- Tough woven polypropylene geotextile that delivers consistent performance
- Internal belts used as attachment points allow fabric to hold maximum loads without additional reinforcement
- **Replacement for wire back silt fence**
- Belts provide linear support to disperse weight of stormwater and sediment over the full system.
- Enhanced durability reduces cost associated with replacement and repairs



Master Rolls	500'	1000'
No Splices - faster install	✓	✓
May be used with Metal Posts	✓	✓
May be used with Wood Posts	✓	✓

Pre-Assembled	48' Long	100' Long
4' Centers - Oak/Hardwood Posts	✓	
6' Centers - Oak/Hardwood Posts		✓

PERIMETER PROTECTION – REINFORCED SILT FENCE



WBSF™ 2 STAGE

Woven Belted Silt Fence (WBSF™)

REINFORCED SILT FENCE

NTPEP Compliant



Structural Integrity – Stormwater Release – Sediment Retention

- Internal belts used as attachment points allow fabric to hold maximum loads without additional reinforcement - provide linear support to disperse weight of stormwater and sediment over the full system.
- **Replacement for wire back silt fence**
- 2 Stage technology reduces the potential for overtopping and undermining:
 - Stage 1 – Sediment retention (50 sieve, >80 gpm/ft² clear water flow)
 - Stage 2 – Stormwater release (>300 gpm/ft² clear water flow)

Master Rolls	500'	1000'
No Splices - faster install	✓	✓
May be used with Metal Posts	✓	✓
May be used with Wood Posts	✓	✓

Pre-Assembled	48' Long	100' Long
4' Centers - Oak/Hardwood Posts	✓	
6' Centers - Oak/Hardwood Posts		✓



PERIMETER PROTECTION – REINFORCED SILT FENCE



WBSF™ 2 STAGE COMBO

WOVEN BELTED SILT FENCE (WBSF™)

REINFORCED SILT FENCE

NTPEP Compliant

PERIMETER PROTECTION - REINFORCED SILT FENCE



Combines 2-Stage silt fence with a high visibility delineation top in one fence. Installing one fence to do two jobs saves money!

- Internal belts used as attachment points allow fabric to hold maximum loads without additional reinforcement - provide linear support to disperse weight of stormwater and sediment over the full system.
- **Replacement for wire back silt fence**
- The first stage above ground line is the high efficiency 50 sieve sediment retention stage
- 2 Stage technology reduces the potential for overtopping and undermining:
 - Stage 1 – Sediment retention (50 sieve, >80 gpm/ft² clear water flow)
 - Stage 2 – Stormwater release (>300 gpm/ft² clear water flow)

Structural Integrity – Stormwater Release – Sediment Retention



Master Rolls	500'	1000'
No Splices - faster install	✓	✓
May be used with Metal Posts	✓	✓
May be used with Wood Posts	✓	✓

Pre-Assembled	48' Long	100' Long
4' Centers - Oak/Hardwood Posts	✓	
6' Centers - Oak/Hardwood Posts		✓




Patent Pending

SILT FENCE OUTLET

Pre-assembled Silt Fence Outlet
Replaces traditional dewatering outlets

A structurally enhanced dewatering outlet designed to be incorporated within the perimeter control. The Silt Fence Outlet (SFO) provides the controlled release of excessive stormwater while maintaining sediment control.

- The Silt Fence Outlet offers a dual-purpose design using 2 Stage technology for greater sediment retention while still providing for controlled storm water release as sheet flow
 - Upper Stage is made of high visibility, high flow green mesh providing >1100gpm/ft² controlled storm water release and filtration of storm water
 - Lower Stage is a non-woven filter fabric for sediment retention
- Compression tubes, filled with kiln dried wood chips and held in place with compression stakes, prevent undermining while contributing to system structural integrity, storm water control and sediment retention

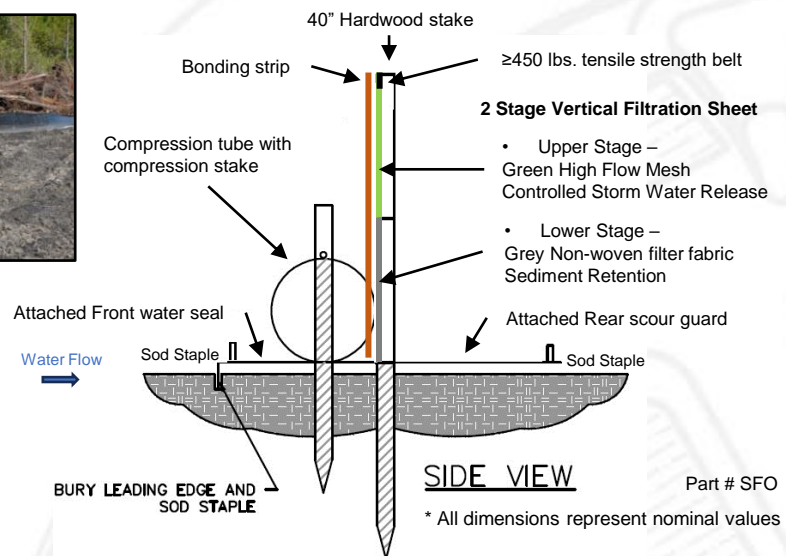

- Preassembled and sold as a kit to ensure quality control and consistency of installation
- Kit Includes:
- 2-Stage vertical sheet preassembled with posts on 2' centers (14' long silt fence outlet)
 - Attached front water seal and rear scour guard, with sod staples
 - 3 compression tubes with 6 compression stakes
 - 4 bonding strips and hardware

PERIMETER PROTECTION - SILT FENCE OUTLET



HIGH VISIBILITY DELINEATION FENCE

Barrier Fence / Tree Save

Part# BFG / BFO



DELINEATION FENCE-BARRIER FENCE

Structural Integrity – Durability

- Woven high-density polyethylene (HDPE) creates a more sustainable ultraviolet (UV) coloration and durable fabric
- Superior structural integrity due to unique method of attachment (sandwiching fabric between the post and a bonding strip)
- Available in **Orange** (Caution, warning, or danger)
- Available in **Green** (Water bodies and environmentally sensitive areas)

AVAILABLE IN PRE-STAKED 100 LINEAR FT ROLLS ON 8 FT CENTERS



R100A FRAME & FILTER ASSEMBLY

Round Base 60"



Round Base 60"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention



Two Replaceable Filter Options

2 STAGE DOT Filter

- Superior sediment filtration in slurry conditions
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

High Flow Filter

- Clear water flow of >1100 gpm/ft²
- Effective when high flow of water expected to prevent flooding
- Keeps trash & floatables out of pipe system

INLET PROTECTION



R300B SPECIALTY ASSEMBLY

Frame and Filter Assembly Approved for DOT of Maryland and Virginia

Round Base 60"



Round Base 60"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention


R300B - 2 Stage DOT Specialty Filter Approved for Maryland and Virginia



- Superior sediment filtration in slurry conditions
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

INLET PROTECTION



S200A FRAME & FILTER ASSEMBLY

Square Base 62" X 62"



Square Base 62" X 62"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention



Two Replaceable Filter Options



2 STAGE DOT Filter

- Superior sediment filtration in slurry conditions
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

High Flow Filter

- Clear water flow of >1100 gpm/ft²
- Effective when high flow of water expected to prevent flooding
- Keeps trash & floatables out of pipe system

INLET PROTECTION



S400B SPECIALTY ASSEMBLY

Frame and Filter Assembly Approved for DOT of Maryland and Virginia

Square Base 62" X 62"



Square Base 62" X 62"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention


S400B - 2 Stage DOT Specialty Filter Approved for DOT of Maryland and Virginia



- Superior sediment filtration in slurry conditions
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

INLET PROTECTION



A700A FRAME & FILTER ASSEMBLY

Rectangle Base 38" X 57"



Rectangle Base 38" X 57"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention



Two Replaceable Filter Options



2 STAGE DOT Filter

- Superior sediment filtration in slurry conditions
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

High Flow Filter

- Clear water flow of >1100 gpm/ft²
- Effective when high flow of water expected to prevent flooding
- Keeps trash & floatables out of pipe system

INLET PROTECTION



A1000A FRAME & FILTER ASSEMBLY

Square Base 36" X 36"



Square Base 36" X 36"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention



Two Replaceable Filter Options



2 STAGE DOT Filter

- Superior sediment filtration in slurry conditions
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

High Flow Filter

- Clear water flow of >1100 gpm/ft²
- Effective when high flow of water expected to prevent flooding
- Keeps trash & floatables out of pipe system

INLET PROTECTION



A1100A FRAME & FILTER ASSEMBLY


Square Base 48" X 48"



Square Base 48" X 48"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention

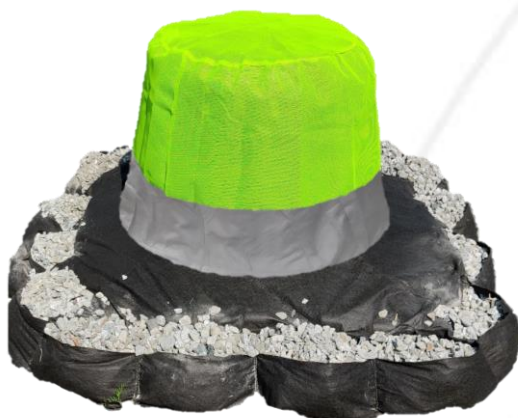

Two Replaceable Filter Options

2 STAGE DOT Filter

- Superior sediment filtration in slurry conditions
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

High Flow Filter

- Clear water flow of >1100 gpm/ft²
- Effective when high flow of water expected to prevent flooding
- Keeps trash & floatables out of pipe system





LPR500 FRAME & FILTER ASSEMBLY

Low Profile Rectangle 30" X 46" X 16"



- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Low Profile for Non-sump use
Rectangle 30" X 46" X 16"

Structural Integrity – Stormwater Release – Sediment Retention

LPR500A High Flow Filter ONLY




LPR500A-HF

High Flow Mesh
Frame size 30" x 46" x 16"

- Clear water flow of >1100 gpm/ft²
- Sediment filtration through rock bags
- Prevents flooding with high flow of water
- Keeps trash & floatables out of pipe system
- For non-sump conditions



Non-Woven
Rock Bag



HIGH FLOW

INLET PROTECTION NON-SUMP



LPS600 FRAME & FILTER ASSEMBLY

Low Profile Square 42" X 42" X 16"



Low Profile for Non-sump use
Square 42" X 42" X 16"

- ✓ Reusable high molecular weight polyethylene frame, replaceable filters
- ✓ Structural design for concentrated flow
- ✓ Fast, simple installation
- ✓ No failures due to stakes in uncompacted soil
- ✓ Consistent performance
- ✓ Practical, functional and economical

Structural Integrity – Stormwater Release – Sediment Retention

LPS600A High Flow Filter ONLY




LPS600A-HF

High Flow Mesh
Frame size 42" x 42" x 16"

- Clear water flow of >1100 gpm/ft²
- Sediment filtration through rock bags
- Prevents flooding with high flow of water
- Keeps trash & floatables out of pipe system
- For non-sump conditions



Non-Woven
Rock Bag



HIGH FLOW

INLET PROTECTION NON-SUMP



A1200A FRAME & FILTER ASSEMBLY

Round Base 38"



Round Base 38"

- Designed for smaller drains, such as yard inlets, golf course drains, landscape drains, beehive drains, and drywells that are 30" or less.
- Reusable high molecular weight polyethylene frame with replaceable filters.
- Consistent performance retaining sediment from concentrated flow.
- Can help prevent filling of drywells with sediment and leaves.
- Fast, simple installation.

Structural Integrity – Stormwater Release – Sediment Retention



Two Replaceable Filter Options



2 STAGE Filter

- Superior sediment filtration in slurry conditions
- Used during construction to keep sediment out of drains and small inlets.
- Stage 1 - Sediment filtration (exceeds 96% efficiency)
- Stage 2 - High flow fabric top for stormwater release
- High visibility top marks inlet location



Stage 1



Stage 2

High Flow Filter


- Keeps trash, grass & floatables out of pipe system
- Clear water flow >1100 gpm/ft²
- Effective when high flow of water is expected to help prevent flooding

YARD / LANDSCAPE INLET PROTECTION



PEDESTAL INLET WRAP

Flexible Inlet Protection for Pedestal Top Inlets

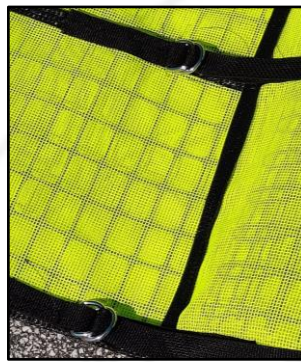

Internal grid provides structural support

"D" rings secure pedestal wrap to inlet

16'6" long to accommodate maximum 60" inlet diameter

Flexible Inlet Protection for Pedestal Top Inlets

- Prevents trash and floatables from entering raised surface inlets while providing passage of stormwater into drainage system
- Reusable, durable, lightweight design of high flow geotextile
- Fast and simple installation – wrap inlet and fasten belts with "D" rings
- Internal grid provides structural support
- Requires no stakes
- Can accommodate round or square pedestal top inlet

PEDESTAL INLET PROTECTION



SS 300 CURB INLET FILTER

Curb Inlet Protection



1' Sleeve to be filled with stone or sandbag

5' Pine Straw Filled

1' Sleeve to be filled with stone or sandbag



Use multiple SS 300s for large inlet openings
Create adjustable weir with ends containing sand or stone bags.



Single SS 300s for 5' inlet opening
Use of center weir recommended

Kit Includes: SS 300 Curb Inlet Filter filled with pine straw
2 sandbag inserts
Zip ties
(#57 stone / sand not included)

Structural Integrity – Stormwater Release – Sediment Retention

- Place in front of curb inlet or opening to prevent migration of sediment into storm drain system
- Pine straw wrapped in high flow-high visibility polyester green mesh with pockets for weighted bags on each end
- Biodegradable core materials offer an environmentally friendly alternative to recycled rubber / wire materials that can pollute our waterways
- Pine straw filling resists absorption of storm water and maintains shape.
- Flexible, light weight for easy shipping, hauling and installation. When filled with stone or sand, weighted bags keep filter in place and provide weir as needed



PIPE STOPPER

Pipe Inlet Protection

PIPE INLET PROTECTION

Horizontal pipe device installed during construction prevents entry of sediment and floatables while allowing passage of stormwater




Friction fingers clip into HDPE, Concrete, or Metal Corrugated Pipe

Available plate sizes and filters				
Inside Dimension of Pipe	High Flow	2 Stage 50/50 Filter	2 Stage Filter	*2 Stage Specialty Filter VA & MD
12"			●	●
15"	●		●	●
18"	●	●	●	●
24"	●	●	●	●
30"	●	●	●	●
36"				●



High Flow Filter

100% high flow green mesh



2 Stage 50/50 Filter

50% high flow green mesh
50% nonwoven (>96% efficiency) filter



2 Stage Filter

75% high flow green mesh
25% nonwoven (>96% efficiency) filter

*Specialty filter available for VA & MD




- Reusable HDPE frame with replaceable filter options
- Fast, easy installation and removal
- Designed for inlet side of pipe only



TRAVEL LANE WATTLE

High Visibility Sediment Log

Curb inlet protection, slope erosion control & stream protection

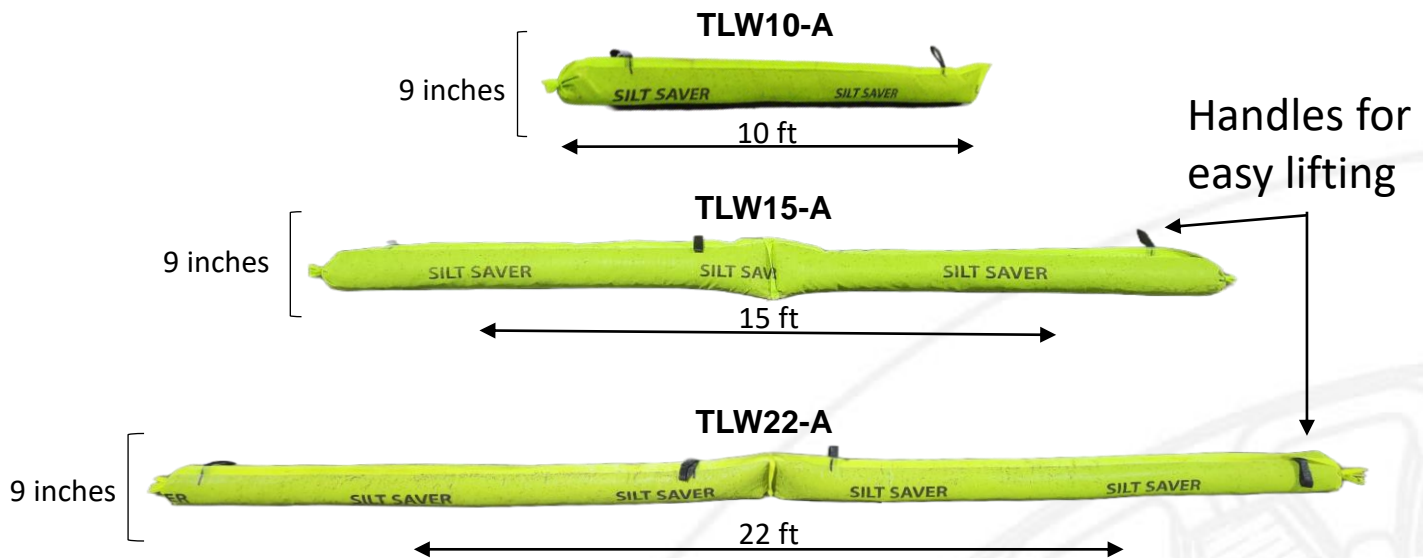

WATTLES

- ▶ Reusable sediment control device
- ▶ **Pine straw wrapped in high flow-high visibility polyester green mesh**
- ▶ Biodegradable natural core offers an environmentally safe alternative to recycled rubber / wire materials that can pollute our waterways
- ▶ Pine straw core prevents mold and compaction often associated with traditional wheat straw wattles that can lead to ponding effects
- ▶ Light weight and easily moved to allow traffic bypass



CHIP10 WATTLE

Weighted Chip Wattle

CHIP10-WB



CHIP10-GR



Nominal 9 inches diameter X 10 feet in length

Velocity dissipation and sediment retention

- ▶ Filled with kiln dried pine chips – Biodegradable natural core offers an environmentally safe alternative to recycled rubber / wire materials that can pollute our waterways
- ▶ Dry weight nominal 58 lbs (weigh less for shipment and installation)
- ▶ Wet weight nominal 145 lbs (stays in place)
- ▶ Kiln dried chips expand when wet. (keeps shape)
- ▶ Option of two durable sleeves:
 - ▶ High visibility green polypropylene mesh
 - ▶ Black woven geotextile fabric
- ▶ Convenient handles for easy lifting

WATTLES



COMPRESSION TUBE

Weighted Chip Wattle



Kit includes
one 5' compression tube
and two compression stakes

Nominal 5 feet in length by 9 inches in diameter



Velocity dissipation and sediment retention

- Polypropylene sleeve filled with kiln dried pine chips (biodegradable / weed and seed free)
- Environmentally friendly alternative to recycled rubber / wire materials
- Durable sleeve with handles for easy application and removal
- Compression stakes apply downward pressure to prevent undermining
- Dry weight nominal 30 lbs (weigh less for shipping and installation)
- More than doubles weight when wet (stays in place)
- Kiln dried chips expand when wet (keeps shape)



HIGH VELOCITY DITCH CHECK

****Patent Pending****

Pre-assembled Check Dam



HVDC 24 for flat bottom, trapezoidal ditch



HVDC 14 for V shaped ditch

Temporary barrier slows velocity of channel stormwater and facilitates controlled stormwater release through the fabric onto the rear scour guard

- 2 options prefabricated and contoured to angles of ditch slopes:
 - **HVDC 24**– 24' wide with 24" overflow for flat bottom, trapezoidal ditch
 - **HVDC 14** –14' wide with 16" overflow for V shaped ditch
- Preassembled and sold as a kit to ensure quality control and consistency of installation:
 - Velocity restrictor sheet prefabricated with posts
 - Attached front water seal and rear scour guard
 - Additional rear scour guard extension
 - Compression tubes with compression stakes
- Velocity restrictor sheet of green mesh allows floatables to contribute to filtration of stormwater
- Attached front water seal and pine chip filled compression tubes held in place with compression stakes prevent undermining
- Rear scour guard prevents scouring and undermining
- **More effective, less costly, and less maintenance than traditional rock check dam**



Rear scour guard



Natural floatables contribute to filtration on green mesh of velocity restrictor sheet

DITCH CHECK



LOW VELOCITY DITCH CHECK

****Patent Pending****

PRE-ASSEMBLED CHECK DAM



Kit includes:

1. Low Velocity Ditch Check with attached front water seal and rear scour guard
2. 3 compression stakes
3. 16 sod staples

Structural Integrity – Stormwater Release – Sediment Retention

- Designed as a temporary barrier to slow the velocity of channel stormwater
- Resists undermining associated with traditional wattles used in this capacity
- A multi-component system consisting of:
 - a durable woven geotextile sleeve filled with kiln dried pine chips
 - an underlying attached front water seal and rear scour guard to prevent undermining
 - compression stakes and sod staples to maintain placement
- Preassembled and sold as a kit to ensure quality control and ease as well as consistency of installation
- **More effective, lower cost, and less maintenance than traditional LOW VELOCITY rock check dams**

DITCH CHECK



BOTTOM DRAIN ATTACHMENT ASSEMBLY


BDA 500 Assembly

Creates an Enclosed Stormwater Filter System



12" HDPE pipe and elbows are not sold by Silt Saver.

- BDA Assembly creates a tiered temporary retention system
- May be used for construction sites that do not have space for larger retention ponds
- May be used individually or connected in series for linear job sites such as pipelines or transmission lines

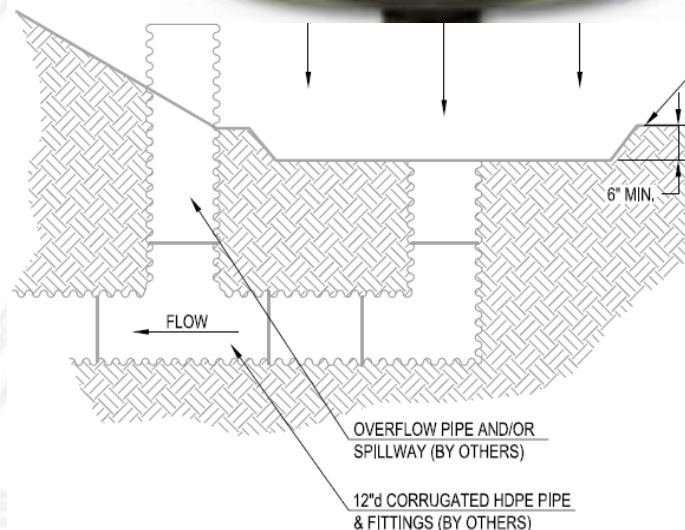

Off Site Flow
←




ENCLOSED STORMWATER FILTRATION SYSTEM




SLOPE DRAIN BAG

Sediment Collection

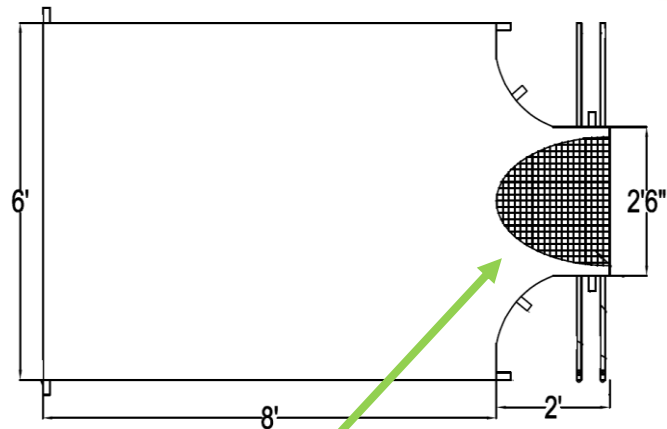

Part# SDB

Green mesh is for emergency storm water overflow

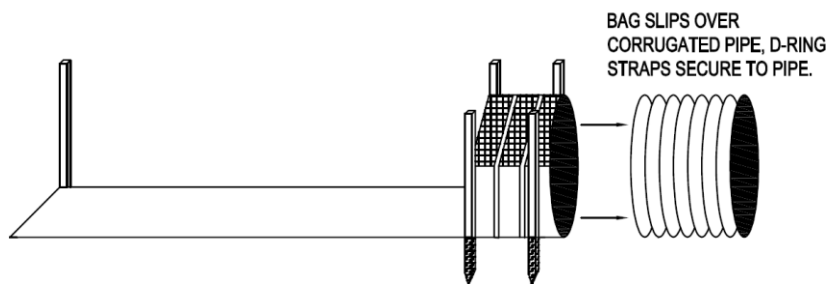

Kit includes 7 stakes

Structural Integrity – Stormwater Release – Sediment Retention


- Attaches to temporary slope drain for sediment collection
- Designed to fit 12" or smaller HDPE slope drainpipe.
- Built in emergency stormwater overflow, reduces force on the bag and slope drain system
- D-ring straps, stake loops and 7 stakes are used to secure the bag in place
- For use on construction sites, power plants, dredging areas and more to protect surrounding streams, property, and storm sewers

SEDIMENT COLLECTION



UNDER GRATE SEDIMENT BAG

Sediment Collection

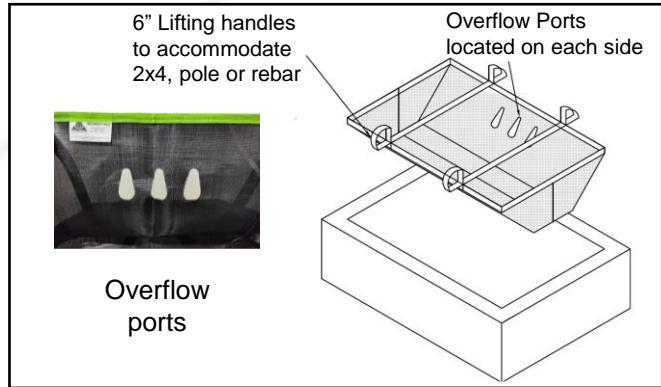

Available Sizes

18"x36", 21"x29", 24"x24", 24"x36", 24"x48", 27"x27", 28"x36", 36"x36", 36"x48", 40"x55"

Designed for under grate sediment collection

- Filters sediment and construction debris out of stormwater to reduce costly basin and pipe system cleaning
- 40 sieve woven polypropylene geotextile allows water filtration and sediment retention
- Built in overflow ports prevent flooding during rain events
- UV resistant, durable and reusable
- Handles and load supporting harness for easy installation / removal / cleaning and replacement
- Hangs unobtrusively under stormwater grates – does not impede traffic above
- High visibility green edging is easily seen by workers and inspectors to show sediment protection in place



DEWATERING BAG

Sediment Collection



Available Sizes

8 oz - 6' x 6' / 10' x 15' / 15' x 15'

Structural Integrity – Stormwater Release – Sediment Retention

A high efficiency, high pressure filtration (pump) bag designed to collect sediment from collected water in construction site dewatering applications and pipelines

- Custom designed neck with D-ring tie straps provides secure hose attachment to a variety of pump hose sizes up to 6"
- Protects surrounding streams, property, and storm sewers
- Prevents erosion



UNDER GRATE CITY BAG

Stormwater Grate Trash Collection



Easy trash removal



Hangs under stormwater grates to collect trash / floatables from parking lots and city streets

Available Sizes

12"x48", 21"x29", 24"x 24", 24"x48", 27"x27", 28"x36", 36"x36", 40"x55"


- Perfect for use during festivals / parades / street parties to catch floatables and street trash preventing debris from entering stormwater drains
- Reusable with integrated handles for easy installation, removal, cleaning and replacement
- High flow mesh (9x9 scrim, clear water flow of >1100 gpm/ft²) allows water filtration and overflow ports prevent flooding during heavy rain events
- Hangs unobtrusively under storm water grate – does not impede traffic

TRASH COLLECTION



DRIVEWAY MAT

Construction Entry / Exit

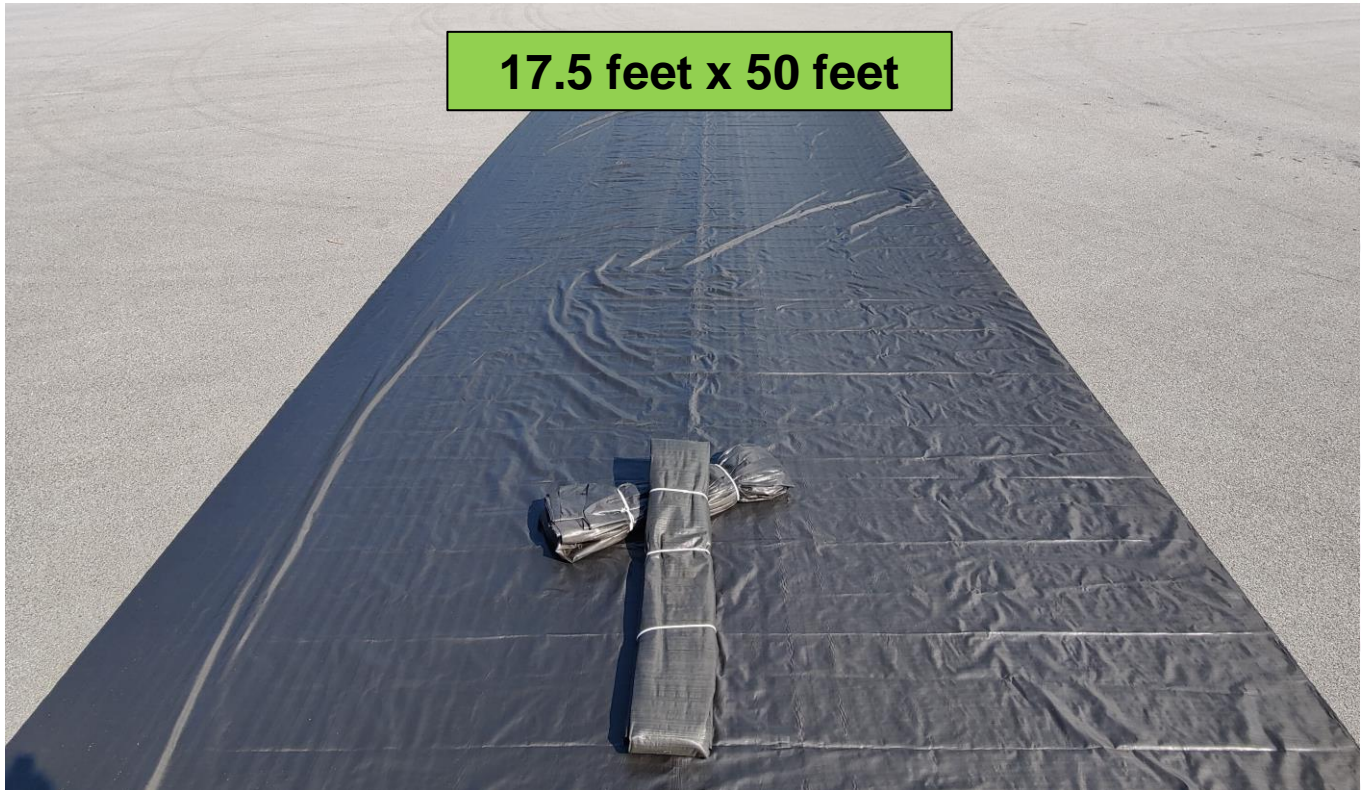

Part# D-600

To be used under
stone as construction
entrance/exit

- Designed for use during construction in entry / exit
- Woven 200 lb. geotextile fabric
- Creates a stabilizing layer between gravel and underlying dirt
- Reduces the amount of gravel required for installation and maintenance resulting in reduction of labor and overall cost

CONSTRUCTION ENTRY / EXIT



Webinar Program

Silt Saver offers monthly webinars on our performance-based erosion and sediment control products.

Join us to learn about Silt Saver products that use innovative best management practices to solve traditional erosion and sediment control problems.

Webinar #1



Webinar 1

Performance based silt fence products.

Syllabus:

- Illustration of known issues with traditional silt fence systems
- Demonstration of WBSF technology and how it provides reinforced silt fence with enhanced structural integrity
- Explanation of 2-Stage technology and its application to create a unique silt fence with stormwater release
- Discussion of BSRF - its superior balance of sediment retention and structural integrity

Speaker: Dave Goff
Position: Sales Manager

Webinar #2



Webinar 2

Reusable inlet protection frame and filters

Syllabus:

- Illustration of known issues with traditional inlet protection BMPs.
- Explanation of 2-Stage technology as it is applied to inlet protection
- Installation and application of Silt Saver's inlet protection frame & filters to solve sediment control issues
- Overview of other Silt Saver erosion and sediment control products to complete your site management

Speaker: Dave Goff
Position: Sales Manager

PDH Available: A Certificate of Completion is available upon request. Please check your local requirements for PDH eligibility.

Register Now!

<https://siltsaver.com/events/>